




SERIES TB50

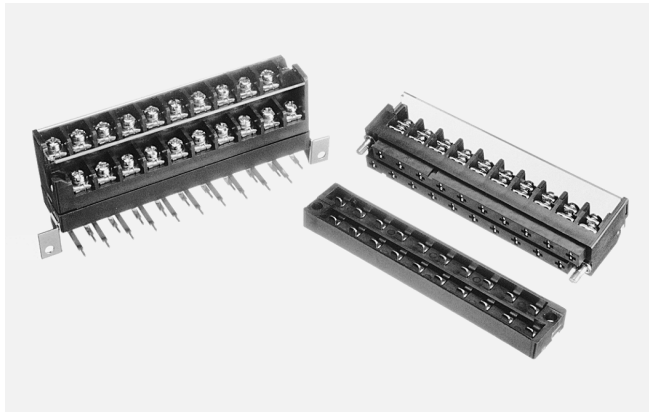

Bi-Level Pluggable 3 Wall Barrier Terminal Block

Specifications

Material:

Insulator: Polyester, black, rated UL 94V-0

Contacts: Brass, gold plated

Screws: Steel, nickel plated

Cover: Clear PVC

Plating:

Gold flash over 100 μ " nickel or optional 200 μ " tin-lead over 100 μ " copper underplate

Electrical:

Operation voltage: 300V AC max

Current rating: 10 Amps max

Insulation resistance: 1000 M Ω min @ 500V DC
between adjacent contacts (75°F and 50% R.H.)

Dielectric withstanding voltage: 2000V AC min rms
(sea level)

Mechanical:

Wire Range: 18-14 AWG

Operating temperature: -40°C to +105°C

Ordering Information

TB50-A24NF

1 2 3 4

1. Configuration

A = Straight PCB

B = Right angle PCB

2. Positions:

20, 24, 26, 30, 36

3. Mounting Options:

N = Without mounting ears *

H = With mounting ears

4. Plating Options:

F = Gold flash *


T = Tin

* standard


Other Options:

C = With Cover

Mounting Ear Option

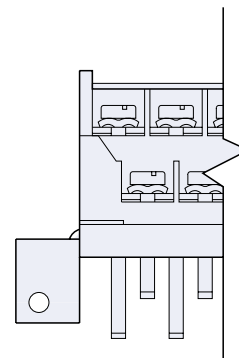

TB50-A

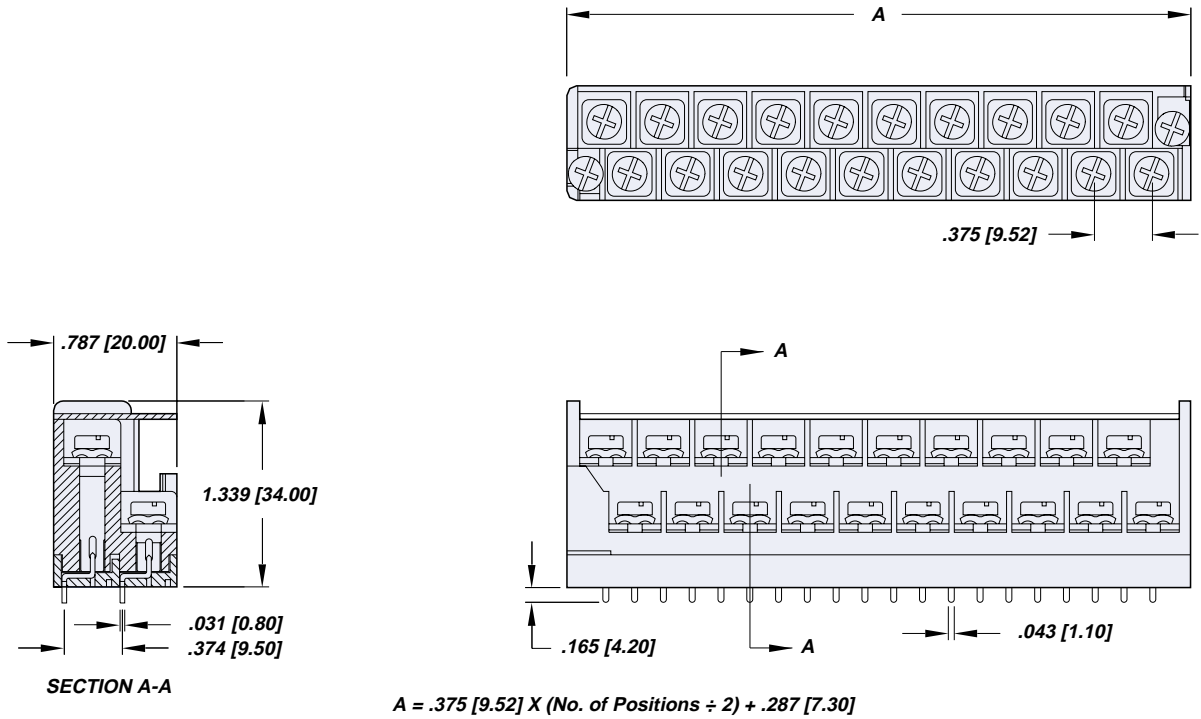

TERMINAL BLOCKS

TB50-B

